

DESIGNER NOTES

IF PILES ARE EXPOSED IN COMPLETED STRUCTURE AND SUBJECT TO BENDING, PLACE THE FOLLOWING NOTE ON PLANS: PILE SPLICES SHALL BE MADE BY A CERTIFIED WELDER USING LOW HYDROGEN ELECTRODES.

IF APPLICABLE, PLACE THE FOLLOWING NOTE ON THE PLANS:
PILES PLACED IN PREBORED HOLES CORED INTO ROCK DO NOT REQUIRE DRIVING.

FULL DESIGN LOADING CAN BE USED IF PREBORED HOLE IS LARGE ENOUGH TO AVOID PILE HANGUPS AND ALLOW FILLING WITH CONCRETE.

NOTES

CAST-IN-PLACE PILE SHELL MATERIAL SHALL BE A.S.T.M. DESIGNATION A-252, GRADE 2 OR EQUAL.

STEEL 'HP' PILE MATERIAL SHALL BE A.S.T.M. DESIGNATION A36.

GRINDING MAY BE USED IN LIEU OF BACKGOUGING.


PILE BEARING CAPACITY

1. CAST-IN-PLACE:
A. 10¾" DIA.-55 T/PILE.
B. 12¾" DIA.- 65 T/PILE.
C. 14" DIA.- 80 T/PILE.

2. STEEL 'HP':
A. MAX. STRESS OF 6000 P.S.I. WHERE BOULDERS ARE PRESENT.


A. MAX. STRESS OF 6000 P.S.I. WHERE BOULDERS ARE PRESENT.
B. MAX. STRESS OF 9000 P.S.I. WITHOUT LOAD TEST FOR COMPACT SOILS
AND SOFT ROCK.
C. MAX. STRESS OF 12,000 P.S.I. WITHOUT LOAD TEST IF BEARING ON
SOUND ROCK.
D. MAX. STRESS OF 16,000 P.S.I. WITH LOAD TEST IF BEARING ON SOUND


PILE SIZE	STANDARD) WALL TH	ICKNESSES
10¾"	0.25	0.365	0.500
123/4"	0.25	0.375	0.500
14"	0.25	0.375	0.500

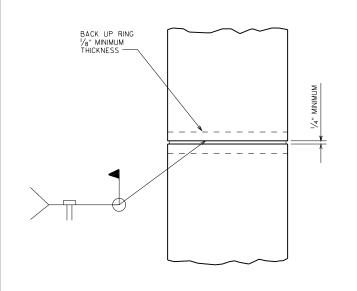

CAST-IN-PLACE

'PIPE PILE'





SECTION THRU CONCRETE CAST-IN-PLACE PILING USED WHEN PILES ARE EXPOSED

(PIER BENTS OR TIMBER BACKED ABUTMENTS)

PILE DETAILS

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION STRUCTURES DEVELOPMENT SECTION

APPROVED:

Stanley W. Woods

6-04

11.1